




温州恒通印刷包装机械有限公司
Wenzhou Hengtong Printing & Packaging Machinery Co., Ltd.

WEB: www.hengtongmachinery.com

E-Mail: sales@hengtongchina.com; hengtongpm@126.com

STDH-550 Hand-bag Bottom Sealing Machine

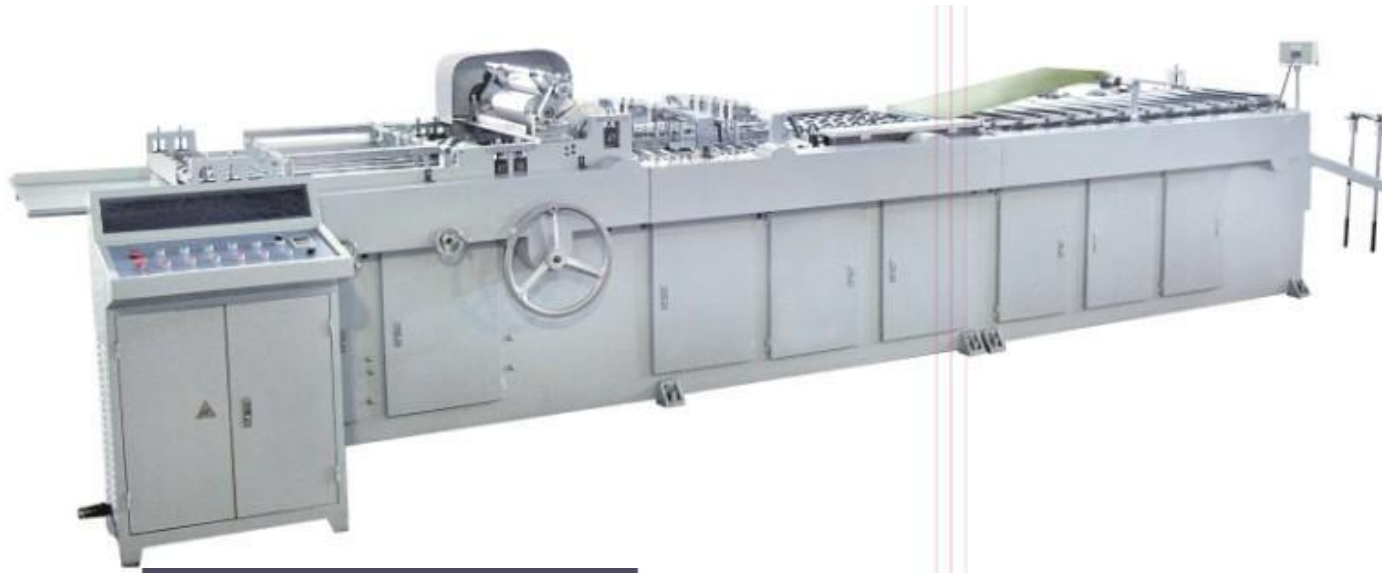


主要技术参数 Main Technical Variables

工作速度	Operation speed	2000-3000pcs/h
适用纸张规格	Applicable paper specification	230x200-550x500mm
适用纸张克度	Applicable paper grammage	128-350g/m ²
糊底尺寸	Bottom folding	70-250mm
主机功率	Power of main machine	2.2kw
整机重量	Weight of complete machine	1000kg
外型尺寸	External dimensions	6350x1200x1300mm

Structural characteristics

1. The machine can perform automatically folding the bottom of the bag.
2. Disk glue applying mode ensure the glue is well distributed.

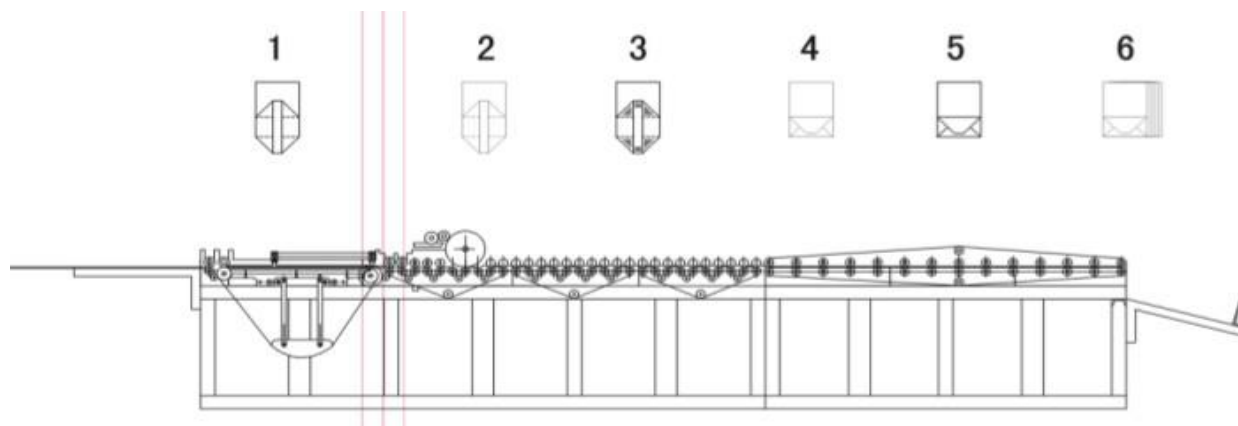

制品流程 Envelop production process

1. 给纸 (Paper feeding)

2. 定位 (Locating)

3. 印胶 (Glue applying)

4. 纵折 (Longitudinally folding)

5. 压合 (Pressing fit)

6. 完成 (Completing)

ADD: Songqiao Industrial Zone, Pingyang County, Zhejiang, China

TEL: 86-577-63770098 FAX: 0086-577-63771198